


Арматура сцепная

ГОСТ 51177-2017 ТУ 27.90.40-105-15207362-2021

Звенья промежуточные переходные типа ПРТ

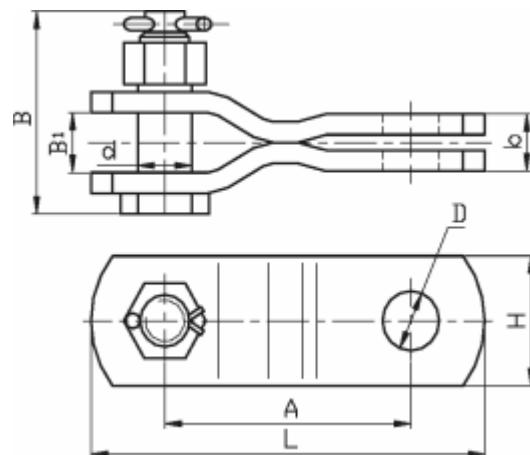

Назначение

Для обеспечения перехода от арматуры одного ряда нагрузки к другому.

Обозначение	Размеры, мм								Масса, кг	Разрушающая нагрузка Р, кН (т.с.), не менее
	A	B	B 1	b	d	D	L	H		
ПРТ-7/12-2	95	78	23	16	20	17	142	50	0,66	70(7)
ПРТ-7/16-2	95	78	26		25		145	45	0,96	70 (7)
ПРТ-7/21-2	105	83	29		28		160	45	1,15	70 (7)
ПРТ-12/7-2	95	65	17	22	16	23	142	50	0,54	70(7)
ПРТ-12/16-2	110	83	26		25		175	60	1,60	120 (12)
ПРТ-12/21-2	110	88	29		28		175	60	1,70	120 (12)
ПРТ-12/45-2	150	115	42	25	40	26	220	63	3,43	120 (12)
ПРТ-16/12-2	110	78	23		22		175	60	1,267	120 (12)
ПРТ-16/21-2	115	88	29		28		185	63	1,90	160 (16)
ПРТ-16/25-2	125	100	34	28	32	29	200	70	2,43	160 (16)
ПРТ-16/30-2	125	105	38		36		200	80	2,56	160 (16)
ПРТ-16/45-2	145	115	42		40		230	80	3,94	160 (16)
ПРТ-21/12-2	110	78	23	32	22	34	175	60	1,50	120 (12)
ПРТ-21/16-2	115	83	26		25		185	63	1,80	160 (16)
ПРТ-21/30-2	140	115	38		36		215	70	3,67	210 (21)
ПРТ-21/45-2	150	120	42	36	40	38	235	80	4,80	210 (21)
ПРТ-21/60-2	170	132	47		45		265	95	6,15	210 (21)
ПРТ-25/12-2	135	78	23		22	40	205	60	1,74	120 (12)
ПРТ-25/16-2	125	83	26	40	25		200	70	1,98	160 (16)
ПРТ-25/21-2	140	98	29		28		215	63	2,96	210 (21)
ПРТ-25/60-2	170	132	47	45	45	47	270	95	6,25	250 (25)
ПРТ-30/12-2	140	78	23		22		210	60	1,90	120 (12)
ПРТ-30/21-2	140	98	29		28		215	70	3,10	210 (21)
ПРТ-30/60-2	175	137	47	58	45	67	275	95	8,30	300 (30)
ПРТ-35/21-2	150	98	29		38		230	70	3,60	210 (21)
ПРТ-45/7-1	72	130	17		16		132	63	2,42	70 (7)
ПРТ-45/12-2	150	78	23	40	22	42	230	63	2,10	120 (12)
ПРТ-45/30-2	160	120	38		36		250	75	5,71	300 (30)
ПРТ-60/45-2	165	130	42		40		275	90	6,22	450 (45)
ПРТ-120/60-1	275	152	47	65	45	67	430	140	17,90	600 (60)
ПРТ-120/90-1	275	175	58		58		450	140	20,80	900 (90)